




**POST MOUNTED SIGN ON LOCAL ROAD
(SPEED LIMIT 25 OR LESS)**



POST MOUNTED SIGN ON ALL OTHER ROADS

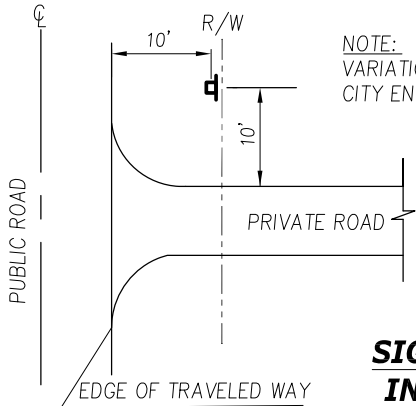

NOTE:
VARIATION FROM THIS SIGN LOCATION BY
CITY ENGINEER WRITTEN APPROVAL ONLY.

ROADWAY DESIGNATION ABBREVIATIONS:

- AV - AVENUE
- ST - STREET
- CT - COURT
- BV - BOULEVARD
- CIR - CIRCLE
- DR - DRIVE
- HY - HIGHWAY
- PKWY - PARKWAY
- PL - PLACE
- LN - LANE
- RD - ROAD
- WY - WAY

AREA ABBREVIATIONS:

- E - EAST
- NE - NORTHEAST
- NW - NORTHWEST
- S - SOUTH
- W - WEST

**SIGN PLACEMENT
IN PUBLIC ROW**

GENERAL NOTES:

1. WHITE TEXT AND BORDER ON A BLUE BACKGROUND.
2. TYPE 4 HIGH INTENSITY SHEETING.
3. USE UPPER AND LOWER CASE LETTERING FOR STREET NAME AND TYPE.
4. SIGN SHALL COMPLY WITH MOST RECENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) AND STANDARD HIGHWAY SIGNS AND MARKINGS BOOK.
5. EXCEPTIONS TO STANDARDS MAY BE PERMITTED BY THE CITY ENGINEER.
6. SIGN MUST BE APPROVED BY THE CITY ENGINEER PRIOR TO INSTALLATION.

LETTERING REQUIREMENTS:

1. STANDARD LETTER SERIES "B" OR "C" (OR "D" FOR A PRIVATE STREET NAME SIGN).
2. DO NOT USE ORDINATE SUFFIXES (1ST, 2ND, 3RD, ETC.)
3. USE STANDARD ROADWAY DESIGNATION AND AREA ABBREVIATION AS LISTED ON THIS SHEET.

SIGN MATERIAL REQUIREMENTS:

4. SHEET ALUMINUM SIGN SHALL BE CONSTRUCTED OF ALLOY 6061-T6, 5052-H36 OR 5052-H38. THICKNESS SHALL BE 0.080" OR 14 GAGE.
5. SIGN FACE MATERIAL SHALL BE MADE OF TYPE IV WHITE SHEETING OVERLAID WITH GREEN ELECTRO CUT FILM WITH STREET NAME CUT OUT.

SIGN POST REQUIREMENTS:

6. SEE CITY OF LAKEWOOD STD PLAN PS-03 - STEEL POST STREET SIGN SUPPORT.

HARDWARE PUBLIC ROAD SIGNS:

7. SIGN BRACKET SHALL BE DIE CAST HIGH STRENGTH ALUMINUM ALLOY DESIGNED FOR MOUNTING ON TOP OF THE STEEL POST.
8. ALL OTHER HARDWARE AND FASTENERS SHALL BE GALVANIZED STEEL.

APPROVED FOR PUBLICATION

Paul A. Bucich 01/10/20
 Paul A. Bucich, P.E.
 PUBLIC WORKS DIRECTOR/CITY ENGINEER



Public Works Department

DATE	REVISION DESCRIPTION	BY	APPROVED
12/27/19	ORIGINAL DRAWING	AD/CD	PAB


6000 Main Street SW 98499

NOT TO SCALE

**Street Name Sign
Public Street**

PS-01


AT NON-ARTERIAL INTERSECTIONS ONLY:

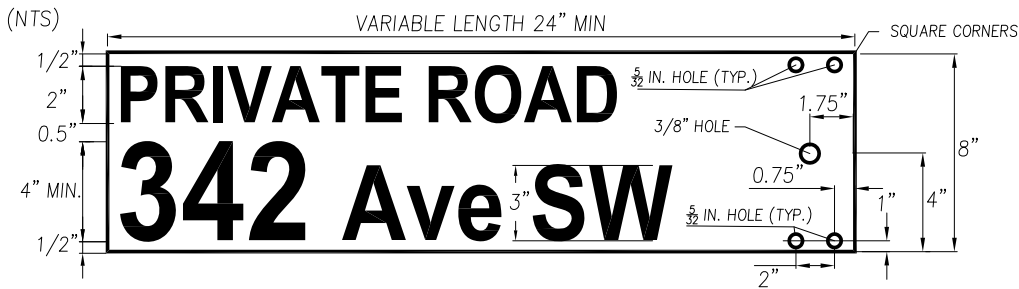

GENERAL NOTES:

1. WHITE TEXT AND BORDER ON A BLUE BACKGROUND.
2. TYPE 4 HIGH INTENSITY SHEETING.
3. USE UPPER AND LOWER CASE LETTERING FOR STREET NAME AND TYPE.
4. SIGN SHALL COMPLY WITH MOST RECENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) AND STANDARD HIGHWAY SIGNS AND MARKINGS BOOK.
5. EXCEPTIONS TO STANDARDS MAY BE PERMITTED BY THE CITY ENGINEER.
6. SIGN MUST BE APPROVED BY THE CITY ENGINEER PRIOR TO INSTALLATION.

AT OR ALONG ARTERIALS:

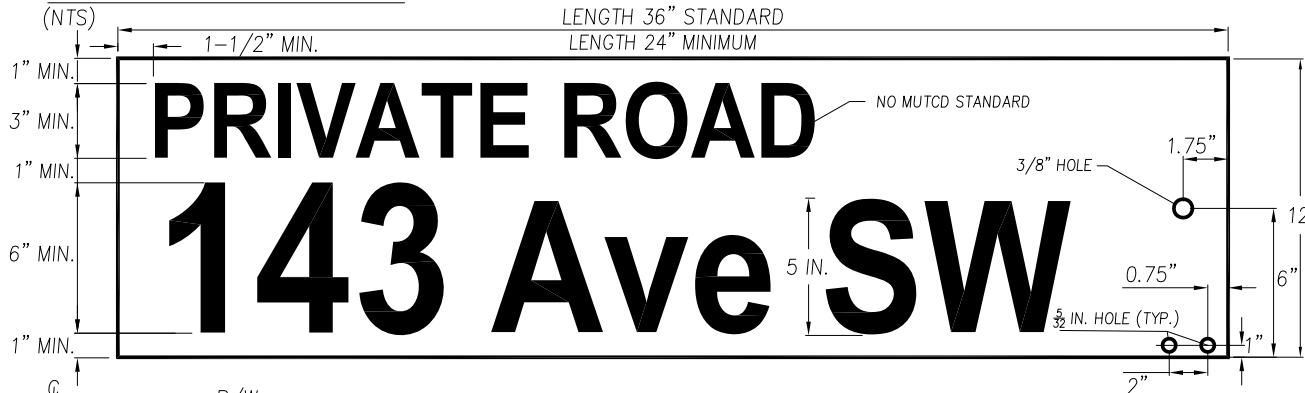

LETTERING REQUIREMENTS:

1. STANDARD LETTER SERIES "B" OR "C" (OR "D" FOR A PRIVATE STREET NAME SIGN).
2. DO NOT USE ORDINATE SUFFIXES (1ST, 2ND, 3RD, ETC.)
3. USE STANDARD ROADWAY DESIGNATION AND AREA ABBREVIATION AS LISTED ON THIS SHEET.

SIGN MATERIAL REQUIREMENTS:

4. SHEET ALUMINUM SIGN SHALL BE CONSTRUCTED OF ALLOY 6061-T6. 5052-H36 OR 5052-H38. THICKNESS SHALL BE 0.080" OR 14 GAGE.
5. SIGN FACE MATERIAL SHALL BE MADE OF TYPE IV WHITE SHEETING OVERLAID WITH BLUE ELECTRO CUT FILM WITH STREET NAME CUT OUT.

SIGN POST REQUIREMENTS:

6. SEE CITY OF LAKEWOOD STD PLAN PS-03 – STEEL POST STREET SIGN SUPPORT.

HARDWARE PRIVATE ROAD SIGNS:

7. USE 4"x4" GALVANIZED LAG BOLT WITH NYLON WASHER FOR CENTER MOUNTING HOLE. SUPPLEMENT LAG BOLT WITH FOUR 2-1/2" 8 D GALVANIZED NAILS IN THE OUTER HOLES.

NOTE:
VARIATION FROM THIS SIGN LOCATION BY
CITY ENGINEER WRITTEN APPROVAL ONLY.


ROADWAY DESIGNATION ABBREVIATIONS:

- AV – AVENUE
- ST – STREET
- CT – COURT
- BV – BOULEVARD
- CIR – CIRCLE
- DR – DRIVE
- HY – HIGHWAY
- PKWY – PARKWAY
- PL – PLACE
- LN – LANE
- RD – ROAD
- WY – WAY

AREA ABBREVIATIONS:

- E – EAST
- NE – NORTHEAST
- NW – NORTHWEST
- S – SOUTH
- W – WEST

**SIGN PLACEMENT
IN PUBLIC ROW**

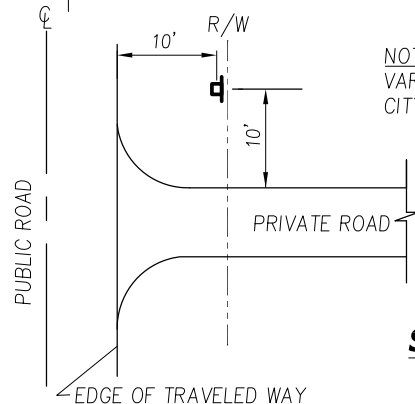

APPROVED FOR PUBLICATION

Paul A. Bucich
Paul A. Bucich, P.E.
PUBLIC WORKS DIRECTOR/CITY ENGINEER

01/10/20
DATE



Public Works Department


DATE	REVISION DESCRIPTION	BY	APPROVED
11/05/19	ORIGINAL DRAWING	AD/CD	PAB

6000 Main Street SW 98499

NOT TO SCALE

**Street Name Sign
Private Street**

PS-02

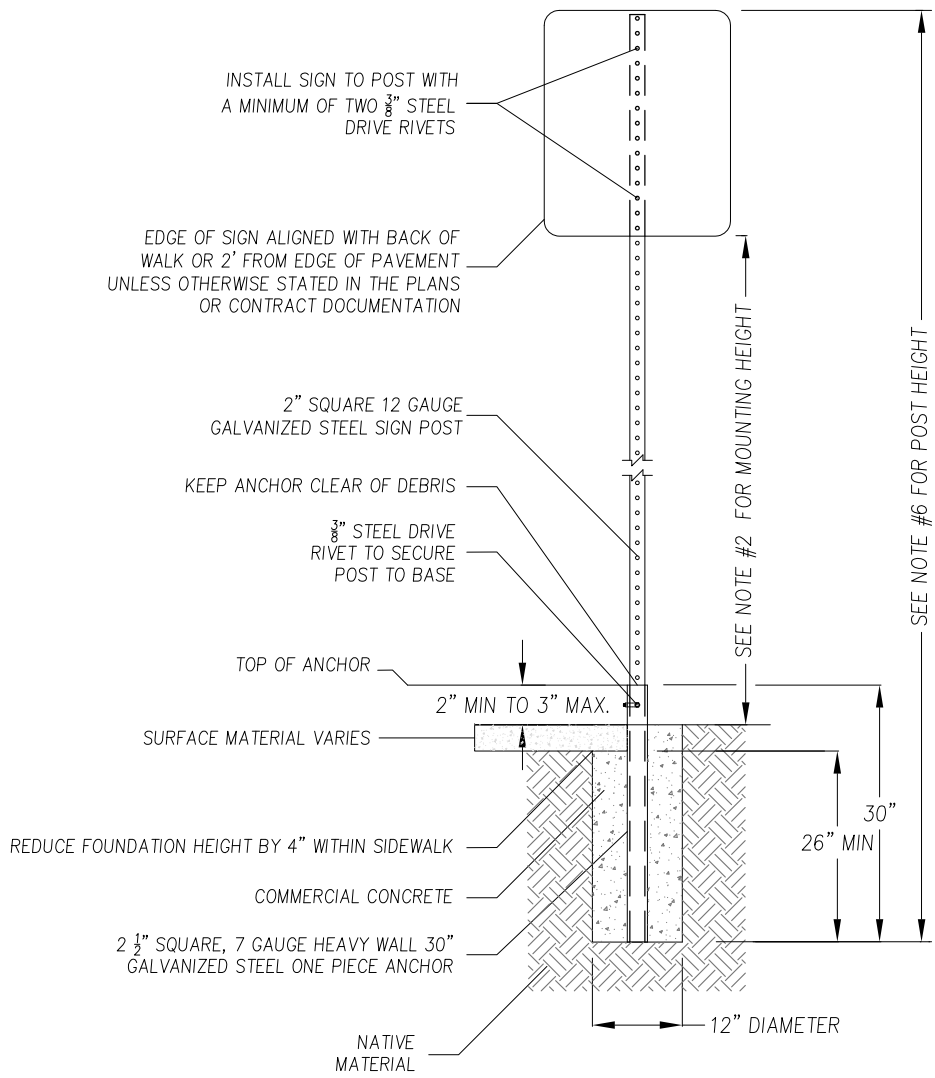

GENERAL NOTES:

1. VERIFY AND STAKE LOCATIONS OF TRAFFIC SIGNS FOR ENGINEER APPROVAL AND ADJUSTMENT PRIOR TO INSTALLATION.
2. MOUNTING HEIGHT SHALL BE 7 FEET UNLESS OTHERWISE APPROVED BY THE ENGINEER WITH EXCEPTION TO:
 - A) MOUNTING HEIGHT FOR SECONDARY SIGNS MOUNTED BELOW ANOTHER SIGN MAY BE REDUCED BY 1 FOOT WHEN NOT LOCATED WITHIN SIDEWALK.
 - B) MOUNTING HEIGHT FOR ARROW AND CHEVRON SIGNS SHALL BE 5 FEET WHEN NOT LOCATED WITHIN SIDEWALK.
3. SIGN FACE SHALL BE TYPE 4 SHEETING.
4. ALL HARDWARE AND FASTENERS SHALL BE GALVANIZED STEEL UNLESS OTHERWISE NOTED.
5. TOP OF FOUNDATION SHALL BE FLUSH WITH FINISH GRADE EXCEPT WHEN COVERED BY SIDEWALK.
6. FOR SIGNS OTHER THAN CHEVRON OR ARROW (WI-6, WI-8):
 - A) USE 12' POST FOR SIGNS UP TO 30" TALL;
 - B) USE 14' POST FOR SIGNS 30-54" TALL;
 - C) CONTACT ENGINEER FOR SIGNS TALLER THAN 54"

APPROVED FOR PUBLICATION

Paul A. Bucich
 Paul A. Bucich, P.E.
 PUBLIC WORKS DIRECTOR/CITY ENGINEER

01/07/21
 DATE



Public Works Department




DATE	REVISION DESCRIPTION	BY	APPROVED
1/7/21	ORIGINAL DRAWING	AD/CD	PAB

6000 Main Street SW 98499

NOT TO SCALE

**Steel Post
 Street Sign Support**

PS-03

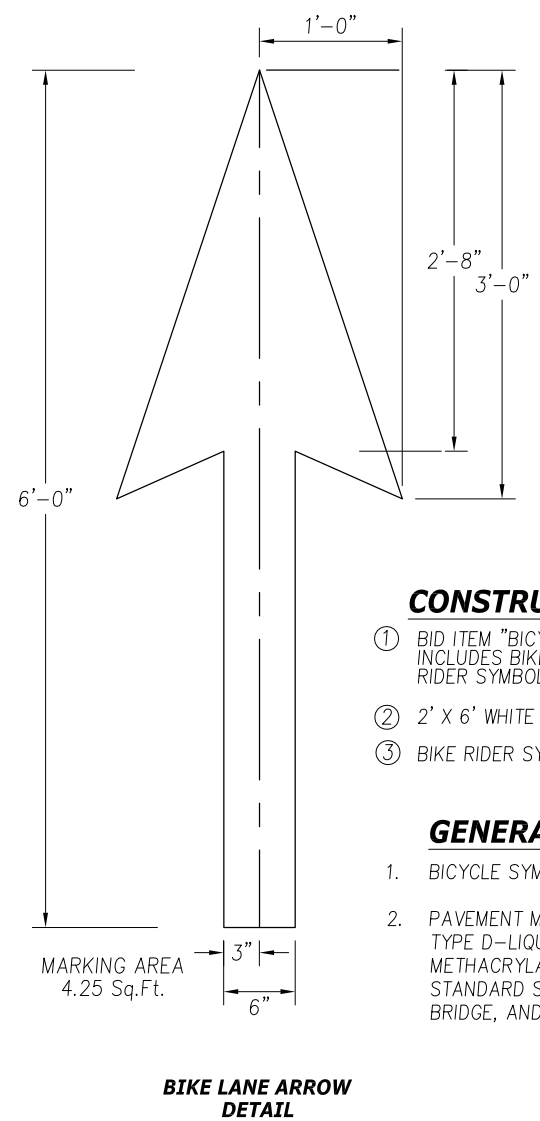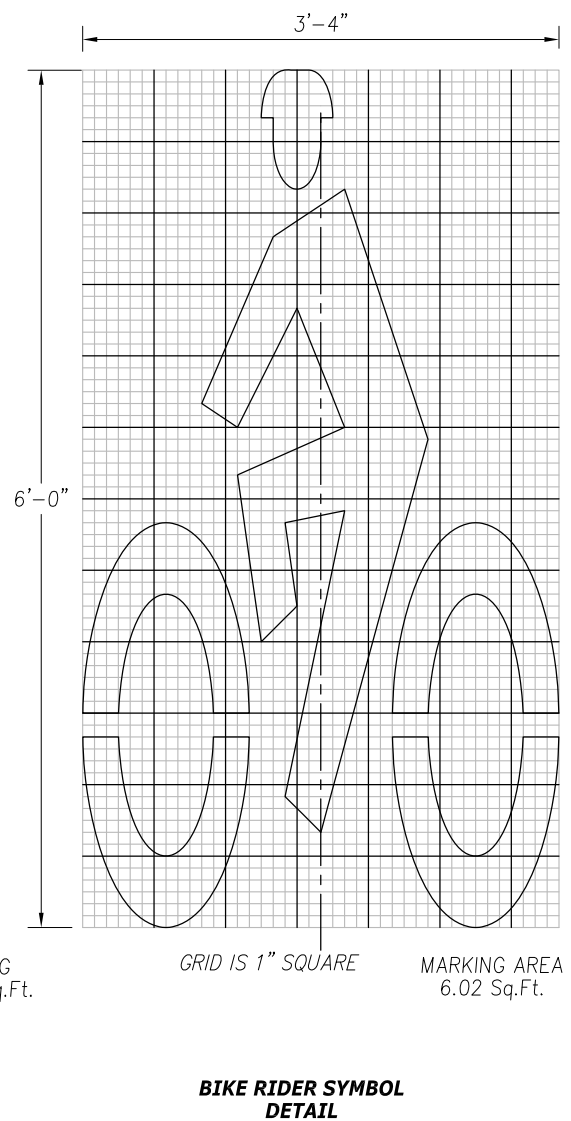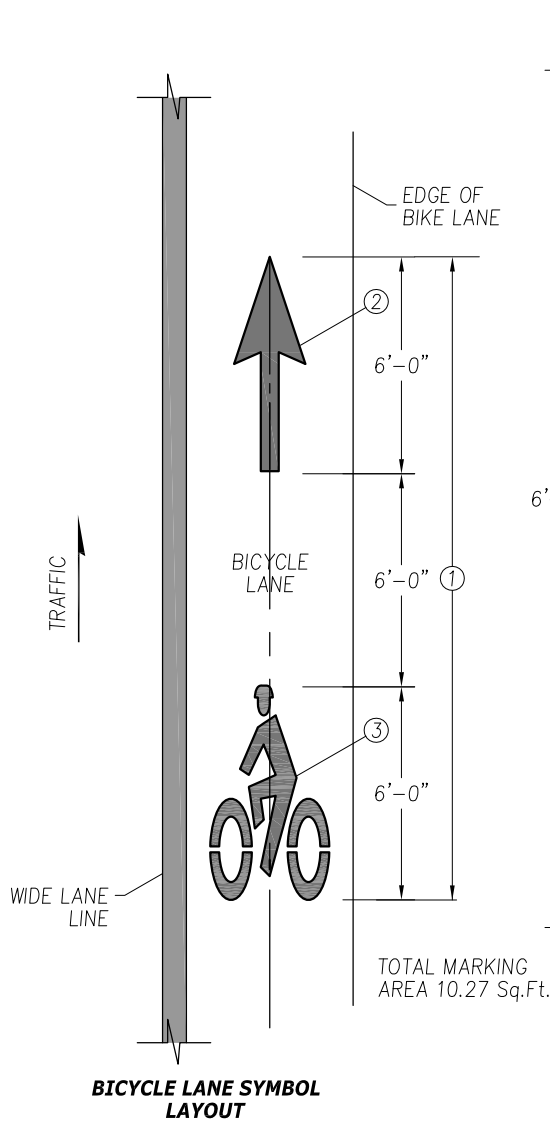

CONSTRUCTION NOTES:

- ① BID ITEM "BICYCLE LANE SYMBOL" INCLUDES BIKE LANE ARROW AND BIKE RIDER SYMBOL
- ② 2' X 6' WHITE BIKE LANE ARROW
- ③ BIKE RIDER SYMBOL

GENERAL NOTES:

- 1. BICYCLE SYMBOLS SHALL BE WHITE.
- 2. PAVEMENT MARKING SHALL BE PLASTIC TYPE D-LIQUID COLD APPLIED METHYL METHACRYLATE (MMA) PER WSDOT STANDARD SPECIFICATIONS FOR ROAD, BRIDGE, AND MUNICIPAL CONSTRUCTION.

APPROVED FOR PUBLICATION

Paul A. Bucich 01/10/20
 Paul A. Bucich, P.E.
 PUBLIC WORKS DIRECTOR/CITY ENGINEER



Public Works Department


DATE	REVISION DESCRIPTION	BY	APPROVED
12/27/19	ORIGINAL DRAWING	AD/CD	PAB

6000 Main Street SW 98499

NOT TO SCALE

Bicycle Lane Symbol Layout

PS-04

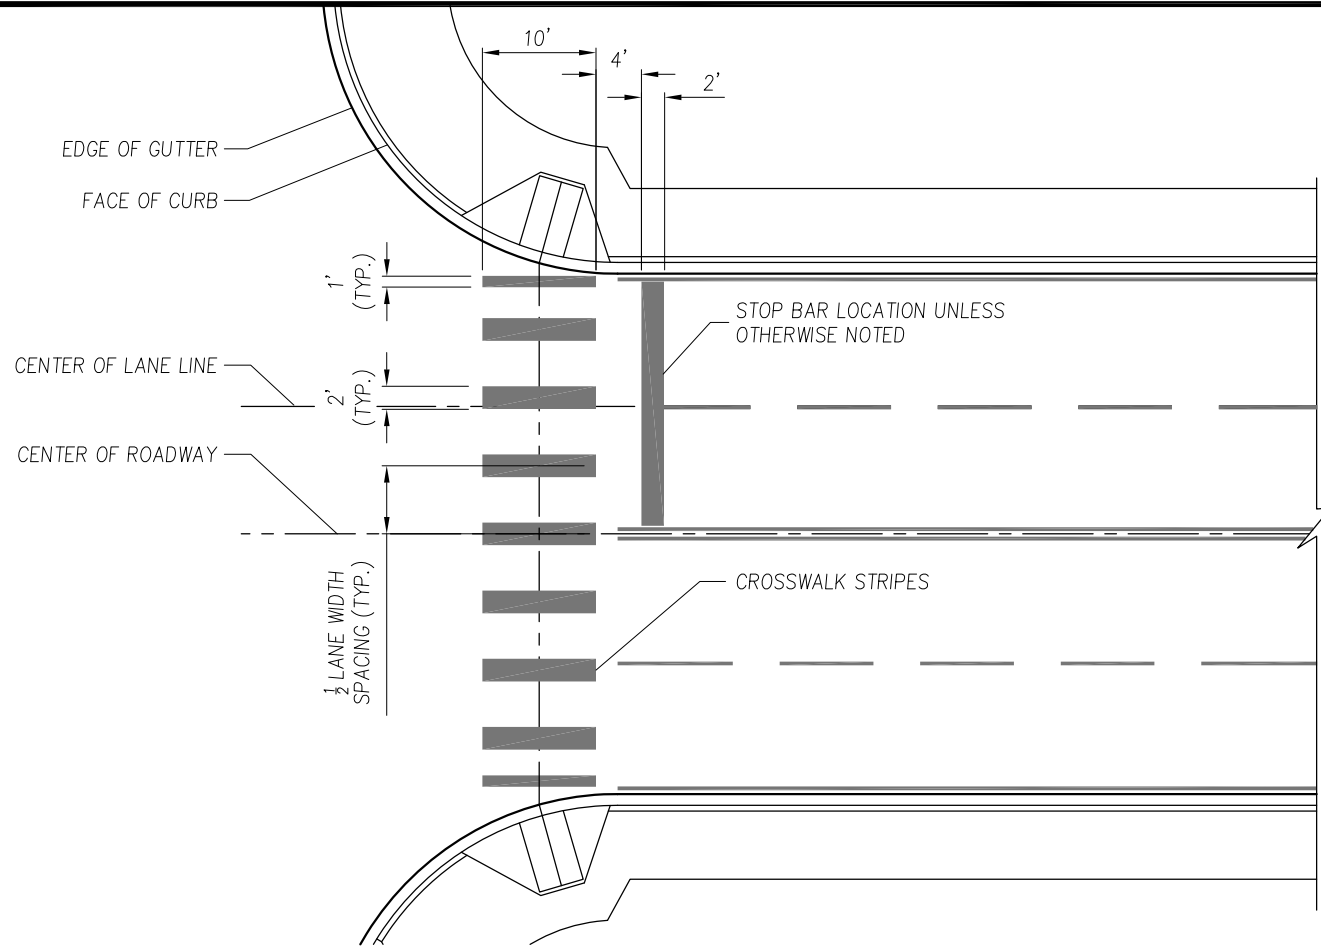

GENERAL NOTES:

1. PAVEMENT MARKING SHALL BE PLASTIC TYPE D-LIQUID COLD APPLIED METHYL METHACRYLATE (MMA) PER WSDOT STANDARD SPECIFICATIONS FOR ROAD, BRIDGE, AND MUNICIPAL CONSTRUCTION.
2. CENTER CROSSWALK ON CURB RAMP ON EACH SIDE OF THE STREET.

APPROVED FOR PUBLICATION

Paul A. Bucich 01/10/20
 Paul A. Bucich, P.E.
 PUBLIC WORKS DIRECTOR/CITY ENGINEER
 DATE



Public Works Department

DATE	REVISION DESCRIPTION	BY	APPROVED
12/27/19	ORIGINAL DRAWING	AD/CD	PAB

6000 Main Street SW 98499

NOT TO SCALE

**Crosswalk
and Stop Bar**

PS-05

